Specifications

Model No.		SME-23DL3	SME-72DL3
CRT	Screen Size	34" Super Flat CRT (32" Viewable)	29" Super Flat CRT (27" Viewable)
	Dot Pitch	0.8 mm Center	0.74 mm Center
Scan Frequency	Horizontal	15 kHz/31~52 kHz	
	Vertical	50~120 Hz	
Resolution		Max 1024 x 768 @ 60 Hz	
Bandwidth		65 MHz	
Display Area		25.4" x 19.0"/644.8 mm x 483.6 mm	21.3" x 16.0"/540.8 mm x 405.6 mm
Audio AMP		12W＋12W Subwoofer, Dyna-Dome	
RGB Signal Compatibility		VGA, SVGA, XGA & MAC	
Video Signal Compatibility		NTSC/PAL/SECAM	
RGB	Input Terminal	D-Sub 15-pin x 2 (front & rear)	
	Output Terminal	D-Sub 15-pin x 1	
Video	Input Terminal	Composite RCA x 2, S-Video x 1	
	Output Terminal	Composite RCA x 1	
Audio	Input Terminal	Composite RCA × 3	
	Output Terminal	Composite RCA × 1	
User Control	General	Power, Input select, Degauss, Menu, Adjust, Volume	
	RGB	Brightness, Contrast, V-Size, V-Center, H-Width, H-Phase	
		Pincushion, Trapezoid, Parallelogram, Rotation	
		R-Gain, G-Gain, B-Gain, Bass, Treble, Balance	
	Video	Brightness, Contrast, Color, Tint, Sharpness	
		R-Gain, G-Gain, B-Gain, Bass, Treble, Balance	
Power Supply		90 ~ 260 VAC 50Hz/60Hz	
Plug And Play Compatibility		DDC 1, DDC 2B	
Regulatory Compliance		TUV, UL, CSA, FCC-B, DHHS, CE, PTB	
Power Consumption		220 W	180 W
Dimensions (W x H x D)		34.1" × 28.3" × 22.9" (866 x 718 × 583 mm)	29.2" × 22.6" × 20.2" (742 × 575 × 512 mm)
Net Weight		156.5 lbs/71 kg	112.4 lbs/51 kg
Container Load		99 sets/40' HQ 30 sets/20'	208 sets/40' HQ 78 sets/20'
Optional Accessories		Tuner Card for NTSC, PAL	

Various Connectors

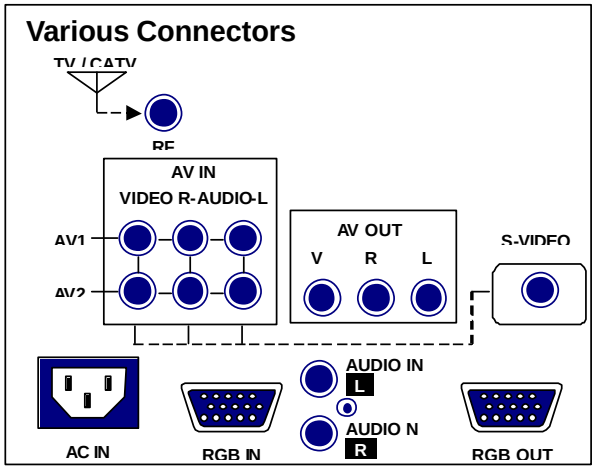

Downloaded from www.Manualslib.com manuals search engine